

LOW VOLTAGE


SOFT STARTERS



AND DC INJECTION

Softstart UK

Analogue



Solbrake DC Injection Brake 10-390A



KW 400V	Solbrake		Dimensions (mm)			Wt. (Kg)
	Brake Type Ampere		W	H	D	
5.0 *	Solbrake 10 *		90	75	105	0.5
7.5	Solbrake 17		65	190	114	1.3
15	Solbrake 31		65	190	114	1.3
30	Solbrake 58		65	190	114	1.3
55	Solbrake 105		154	280	168	5
90	Solbrake 170		154	280	168	5
110	Solbrake 210		154	280	168	5.4
160	Solbrake 310		224	384	222	12
200	Solbrake 390		224	384	222	12

* Note: 5.5KW at 415V



Advantages at a glance

The SMB Electronic Motor Brake provides fast, smooth & frictionless stopping of a three induction phase motor, by injecting controlled DC current to the motor windings, after the mains contactor opened.

- Preventing mechanical wear
- Reducing stopping time of high inertia loads
- Adjustable braking time
- Auto stop - DC Injection stops when motor stops
- DIN Rail mounting (Standard 10A, option 17-58A)
- Easy installation & operation



Standard ratings

- Voltages: 230, 400, 460 & 600V (105-390A are available up to 690V)

Settings


- Braking Torque - Determines the DC current level injected to the motor windings
- Two operation modes
 - Auto Mode: DC Injection stops automatically when motor stops.
 - Manual Mode: DC Injection stops after the pre-adjusted braking time. This mode can be used to "hold" the load at stand still.

Displays (LEDs)

- Mains voltage connected
- Braking Contactor Closed
- DC Injection On

Applications

- Circular and band (flywheel) saws
- Machine tools
- Fast stopping of high inertia loads
- Safety brakes (as long as mains supply remains on)



Solstart Miniature Soft Starter 8-58A, with a built-in bypass

For Three Phase or Single Phase Motors



KW 400V	Solstart		Dimensions (mm)			Wt. (Kg)
	Starter Type Ampere		W	H	D	
4	Solstart 8		45	75	110	0.4
7.5	Solstart 17		90	75	105	0.6
11	Solstart 22		90	75	105	0.6
15	Solstart 31		65	190	114	1.3
22	Solstart 44		65	190	114	1.3
30	Solstart 58		65	190	114	1.3



Advantages at a glance

- Soft start & Soft stop
- Built-in bypass
- Start / Stop by voltage free contact
- End of Acceleration contact, one-N.O (31-58A only)
- Compact, small foot print
- Plastic case 8-22A, Aluminum case for 31-58A
- DIN Rail mounting (Standard 8-22A, option 31-58A)
- Cost effective

Option

- Single phase motor soft starters

Standard ratings


- Voltages: 230, 400, 440, 460 & 600V
- 50 and 60 Hz

Starter Protection

- SCR protection by Metal Oxide Varistors

Displays (LEDs)

- On - mains voltage connected
- Ramp - voltage is ramping up / down
- Run - motor is running



Applications

- Light duty motors in commercial applications
- Small conveyors (post office, supermarkets, etc.)
- Electrically driven gates
- Machine tools
- Appliances

RVS-BX
Basic Soft Starter 8-58A,
with a built-in bypass



RVS-AX
Analogue Soft Starter 8-170A,
with a built-in bypass

Line or Inside Delta connection



KW 400V	Starter Type Ampere	RVS-BX Dimensions (mm)			Wt. (Kg)
		W	H	D	
4	RVS-BX 8	65	190	114	1.2
7.5	RVS-BX 17	65	190	114	1.2
15	RVS-BX 31	120	207	105	2.1
22	RVS-BX 44	120	207	105	2.1
30	RVS-BX 58	120	207	105	2.1

KW 400V	Starter Type Ampere	RVS-AX Dimensions (mm)			Wt. (Kg)
		W	H	D	
4	RVS-AX 8	120	232	105	2.6
7.5	RVS-AX 17	120	232	105	2.6
15	RVS-AX 31	120	232	105	2.6
22	RVS-AX 44	120	232	105	2.6
30	RVS-AX 58	129	275	185	5.0
37	RVS-AX 72	129	275	185	5.0
45	RVS-AX 85	129	380	185	8.4
55	RVS-AX 105	129	380	185	8.4
75	RVS-AX 145	172	380	195	11.8
90	RVS-AX 170	172	380	195	11.8

*Without internal By-Pass

*Without internal By-Pass



Advantages at a glance

- Three phase control
- Soft start & Soft stop
- Built-in bypass (except for 8A)
- Start / Stop by voltage free contact
- End of Acceleration Relay, one-N.O contact
- Compact, small foot print
- Aluminum case
- DIN Rail mounting (option, only for 8-17A)
- Cost effective

Starter Protection

- SCR protection by Metal Oxide Varistors

Displays (LEDs)

- On - mains voltage connected

Applications

- Pumps, Fans, Compressors
- Conveyors & Monorail systems
- Machine tools

Standard ratings

- Voltages: 230, 400, 440, 460 & 600V
- 50 and 60 Hz

Option

- Single phase motor soft starters

Dealers, contact us for quantity discount and / or special design features

HCC
Horizontal Crane Controller



SEM-N
for Naval & Military applications



Advantages at a glance

- Soft start & Soft stop
- Current Limit
- Built in motor Protection
- Built-in bypass (31-170A only)
- Start / Stop by voltage free contact
- Compact, small foot print
- Aluminum case
- Line or Inside Delta connection

Applications

- Pumps
- Compressors
- Fans & Blowers
- Conveyors & Monorail systems
- Starting from weak power supplies (diesel generators, long supply lines, etc.).

Standard ratings

- Voltages: 230, 400, 440, 460 & 600V
- 50 and 60 Hz

Motor & Starter Protection

- Electronic overload
- Phase loss
- Starter over-temperature
- SCR protection by Metal Oxide Varistors

Displays (LEDs)

- On - mains voltage connected
- Ramp Up / Down
- Run
- Overload
- Phase Loss
- Over Temperature

Auxiliary Relays

- End of Acceleration Relay, one-N.O contact
- Fault Relay, one-N.O contact

Digital

INSULATION ALARM
1.2 Mohm



start UK

- Start
- Run
- S.Stop
- Stop
- E.Save / Slow
- D.Adj. / Rev.
- Fault

- Start
- Run
- S.Stop
- Stop
- E.Save / Slow
- D.Adj. / Rev.
- Fault



RVS-DX
Digital Soft Starter 8-820A,
with a built-in bypass

Line or Inside Delta connection



RVS-DN
Digital Soft Starter 8-3500A,
Heavy Duty, Fully featured

Line or Inside Delta connection



KW 400V	RVS-DX				
	Starter Type Ampere	Dimensions (mm)			Wt. (Kg)
		W	H	D	
4	RVS-DX 8	120	232	122	3.1
7.5	RVS-DX 17	120	232	122	3.1
15	RVS-DX 31	120	232	122	3.1
22	RVS-DX 44	120	232	122	3.1
30	RVS-DX 58	129	275	182	5.2
37	RVS-DX 72	129	275	182	5.2
45	RVS-DX 85	129	380	182	8.5
55	RVS-DX 105	129	380	182	8.5
75	RVS-DX 145	172	380	192	11.7
90	RVS-DX 170	172	380	192	11.7
110	RVS-DX 210	380	455	295	30.2
160	RVS-DX 310	380	455	295	30.2
200	RVS-DX 390	350	545	308	55 ¹
250	RVS-DX 460	436	632	318	65
315	RVS-DX 580	436	632	318	75
450	RVS-DX 820	560	650	318	90

¹ Consult factory for final dimensions



Advantages at a glance

- Small footprint
- Complete line 8-820A, 220-600V
- Third generation microprocessor based design circuitry
- Normal duty, fully rated design including built in bypass
- Aluminum case
- Superior starting & stopping characteristics
- Comprehensive Motor Protection package
- RS 485 Modbus Communications
- Frequency autotracking 45-65Hz
- User friendly
- Line or Inside Delta connection
- Unique optional features including: Analogue output and additional future enhancements

Standard ratings

- Voltages: 230, 400, 440, 460 & 600V

Starting & Stopping

- Soft start & soft stop
- Current Limit
- Pump Control Program (See detailed description)
- Torque and Current Control
- Dual Adjustment
- Pulse start
- Slow speed forward and reverse
- Options:
- DOL Starting via external contact
- Fan control for severe duty cycle

Motor & Starter Protection

- Too many starts
- Long start time (Stall)
- Shear-pin (Electronic Fuse for start & run)
- Electronic overload (with selectable curves)
- Under Current
- Phase loss & Phase Sequence
- Under, Over and No voltage
- Load loss (motor not connected)
- Shorted SCR
- Starter over-temperature
- External Fault (Programmable input)
- SCR protection by Metal Oxide Varistors

Displays

- LCD - Two lines of 16 characters each
- Multilingual - English, German, French & Spanish
- Four LEDs - On, Run, Ramp Up/Down, & Fault
- Statistical Data - Start, Stop & Fault parameters
- Full script parameter settings

Controls

- Opto isolated inputs
- Auxiliary relays: Fault, End Of Acceleration or Immediate (programmable)
- Local and Remote reset
- RS 485 Modbus Communications for full control, display and programming (Profibus-contact us)
- Future enhancements: analogue I/O card with Thermistor input, etc.

KW 400V	RVS-DN								
	Starter Type Ampere	Dimensions (mm)			Wt. (Kg)				
		W	H	D					
4	RVS-DN 8	153	310	170	4.5				
7.5	RVS-DN 17	153	310	170	4.5				
15	RVS-DN 31	153	310	170	6.0				
22	RVS-DN 44	153	310	217	7.4				
30	RVS-DN 58	153	310	217	7.4				
37	RVS-DN 72	153	310	217	7.4				
45	RVS-DN 85	274	385	238	15				
55	RVS-DN 105	274	385	238	15				
75	RVS-DN 145	274	385	238	15				
90	RVS-DN 170	274 ¹	385 ¹	238 ¹	15	¹			
110	RVS-DN 210	380	590	455	500	292	290	31	44.8
160	RVS-DN 310	380	590	455	500	292	290	31	44.8
200	RVS-DN 390	380	590	455	500	292	290	31	44.8
250	RVS-DN 460	470	623	640	660 ²	301	290	55	65
315	RVS-DN 580	470	623	640	660 ²	301	290	55	65
450	RVS-DN 820	623	660 ²	290	65				
550	RVS-DN 950	623	660 ²	290	83.5				
630	RVS-DN 1100	723	1100	370	155				
800	RVS-DN 1400	723	1100	370	155				
950	RVS-DN 1800	723	1100	370	155				
1250	RVS-DN 2150	750	1300	392	240				
1400	RVS-DN 2400	900	1300	410	314				
1550	RVS-DN 2700	900	1300	410	314				



¹ Previous version


² When using bypass contactor, add 160mm for bus-bar extensions.

³ Type test

Pump Control (common for RVS-DN, RVS-DX & HRVS-DN)


Start Curves

The RVS-DN (DX) incorporates an Intelligent Pump Control Program that allows selection between three special dynamic voltage ramp-up curves, and Torque or Current curves each further reducing peak torque thus extending acceleration time.




Stop Curves


When pumping to a higher elevation and motor is soft stopped, motor torque may quickly fall below load torque causing abrupt stalling instead of smoothly decreasing speed to zero. This will create a Water Hammer phenomenon resulting in a loud noise and damage to the pipe system. The Pump Control enables selection between 3 dynamic voltage ramp-down or Torque curves to prevent a stall condition and eliminate Water Hammer.



Final Torque

Prior to concluding the deceleration process, motor torque reaches a level where the load torque is higher than motor's torque and the valve closes. The Final Torque feature enables setting a point where the motor stops when the valve closes.



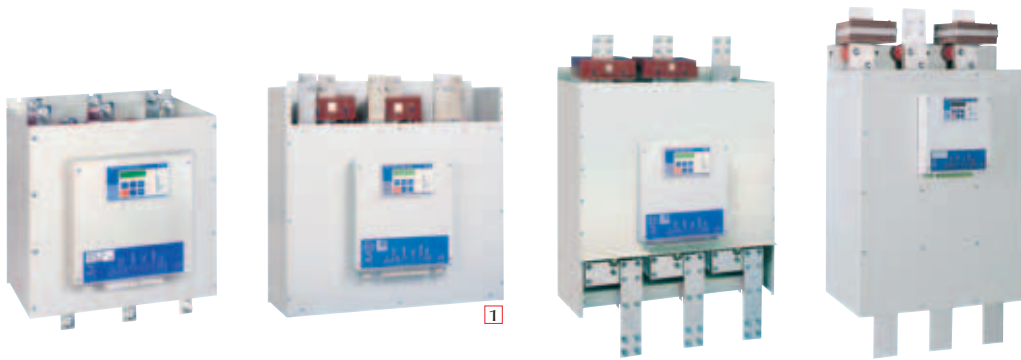

**HRVS-DN
60-1800A, 1500-15000V
Digital, Medium Voltage Soft Starter
Heavy Duty, Fully featured**

Please inquire for our new catalogue.

Advantages at a glance

- Complete line 8-3500A, 220-1000V
- Heavy duty, fully rated design
- Robust construction
- Superior starting & stopping characteristics
- Comprehensive Motor Protection package
- User friendly
- Line or Inside Delta connection
- Maximum ambient temperature: 50°C
- Unique optional features including:
 - Motor Insulation Tester
 - RS 485 Comm. Modbus / Profibus / TCP-IP
 - Thermistor input / Analogue output

Starting & Stopping

- Soft start & soft stop
- Current Limit
- Pump Control Program
- Torque and Current Control for optimized Starting & Stopping process
- Dual Adjustments - Two Starting & Stopping Characteristics
- Slow speed with electronic reversing
- Pulse start
- Linear Acceleration (tacho feedback)
- Energy Save for improved Power Factor

Standard ratings

- 230V, 400V, 500V, 600V, 690V, 1000V

Motor & Starter Protection

- Too many starts
- Long start time (Stall)
- Shear-pin (Start+Run+Jam)
- Electronic overload with selectable curves
- Phase loss & Phase Sequence
- Under, Over & No voltage
- Load loss (motor not connected)
- Shorted SCR
- Starter over-temperature

Displays LCD & LEDs

- LCD - 2 lines x 16 characters
- Selectable languages: English, German, French & Spanish.
- Two display modes for basic & advanced applications
- Friendly operation with Default parameters
- Eight LEDs for quick operational status
- Statistical Data including:
 - Total run time
 - Total number of starts
 - Total number of trips
 - Last start current
 - Last start time
 - Last trip
 - Current at trip



Options

- RS 485 Communication (see details below)
- Analogue Output (see details below)
- Thermistor Input (see details below)
- Motor Insulation Test (see details below)
- Preparation for Bypass - to maintain protection when bypass is closed
- Special Anti-Corrosive Treatment - special coating for harsh environments
- Illuminated LCD
- Special Tacho Feedback Circuitry

Communication (option)

- MODBUS RTU - enables Setting, Control & Supervision
- PROFIBUS DP - enabling Control & Supervision
- TCP/IP - MODBUS/TCP via standard RJ 45 computer network connector

Analogue card (option)

- Incorporates two functions:
- Thermistor input, PTC or NTC
 - Analogue output, related to motor's current, programmable as 0-10VDC, 4-20mA, 0-20mA or inverse

Motor Insulation Tester (option)

- A unique feature for submersible pumps, motors installed in harsh environments, etc. The system measures motor insulation when motor is not running. Two programmable levels are available:
- Alarm level, adjustable 0.2-5 MOhm
 - Start Disable level, adjustable 0.2-5 MOhm, preventing starting when insulation is below acceptable levels

Auxiliary Relays

- Programmable relays, one-C.O 8A, 220VAC
- Immediate with adjustable On and Off delays. Can be dedicated for Shear-pin (Jam) protection.
 - End of Acceleration, with adjustable On delay
 - Fault, programmable as Fault or Fault-fail-safe operation.
 - Low Motor Insulation Alarm (option)

Applications

Industrial

- Pumps
- Hydraulic systems
- Fans & Blowers
- Compressors
- Conveyors

Marine & Offshore

- Complete line 8-3500A, 220-1000V
- Heavy duty, fully rated design
- Robust construction
- Generator ready - auto frequency tracking, sustains variations of 45-65Hz while starting
- User friendly operation
- Unique protection for corrosive environments



The RVS-DN has Lloyds Type Approval for ENV1, ENV2. As well as, Germanische Lloyds & Rina. (Low Voltage to 1400A) ABS, DNV and BV are type tested.

1000V for Mining, Quarry & Mixers

Digital, fiber optically controlled Soft Starter for 20-820A, Robust, Heavy Duty, Fully featured



Additional Products

Additional catalogues available

HRVS-DN
High Voltage Digital Soft-Starter
60-1500A, 1500-13800V



MPS-3000
Motor Protection & Control Relay



MPR 2000 / MPC
Motor Protection Relay
Motor Protection Controller



HIU
Restart Relay



MPR 6/3
Motor Protection Relay



MPC-6
Motor Protection, Control &
Supervision Relay



MPR-6/3-DGF
Motor Protection with
Directional Ground Fault



TPR-6
Digital Temperature
Protection Relay



DPM 10
Digital Power Meter



PFC 10
Reactive Power Factor Controller



SU 124
Generator Control & Protection



DGC 2000
Digital Generator Control
& Protection



Softstart UK

Softstart UK Ltd
PO Box 215
Great Yarmouth
Norfolk
NR31 0LU
Tel: +44 (0)1493 660510
Fax: +44 (0)1493 660511
E-mail: sales@softstartuk.com
Web: www.softstartuk.com